


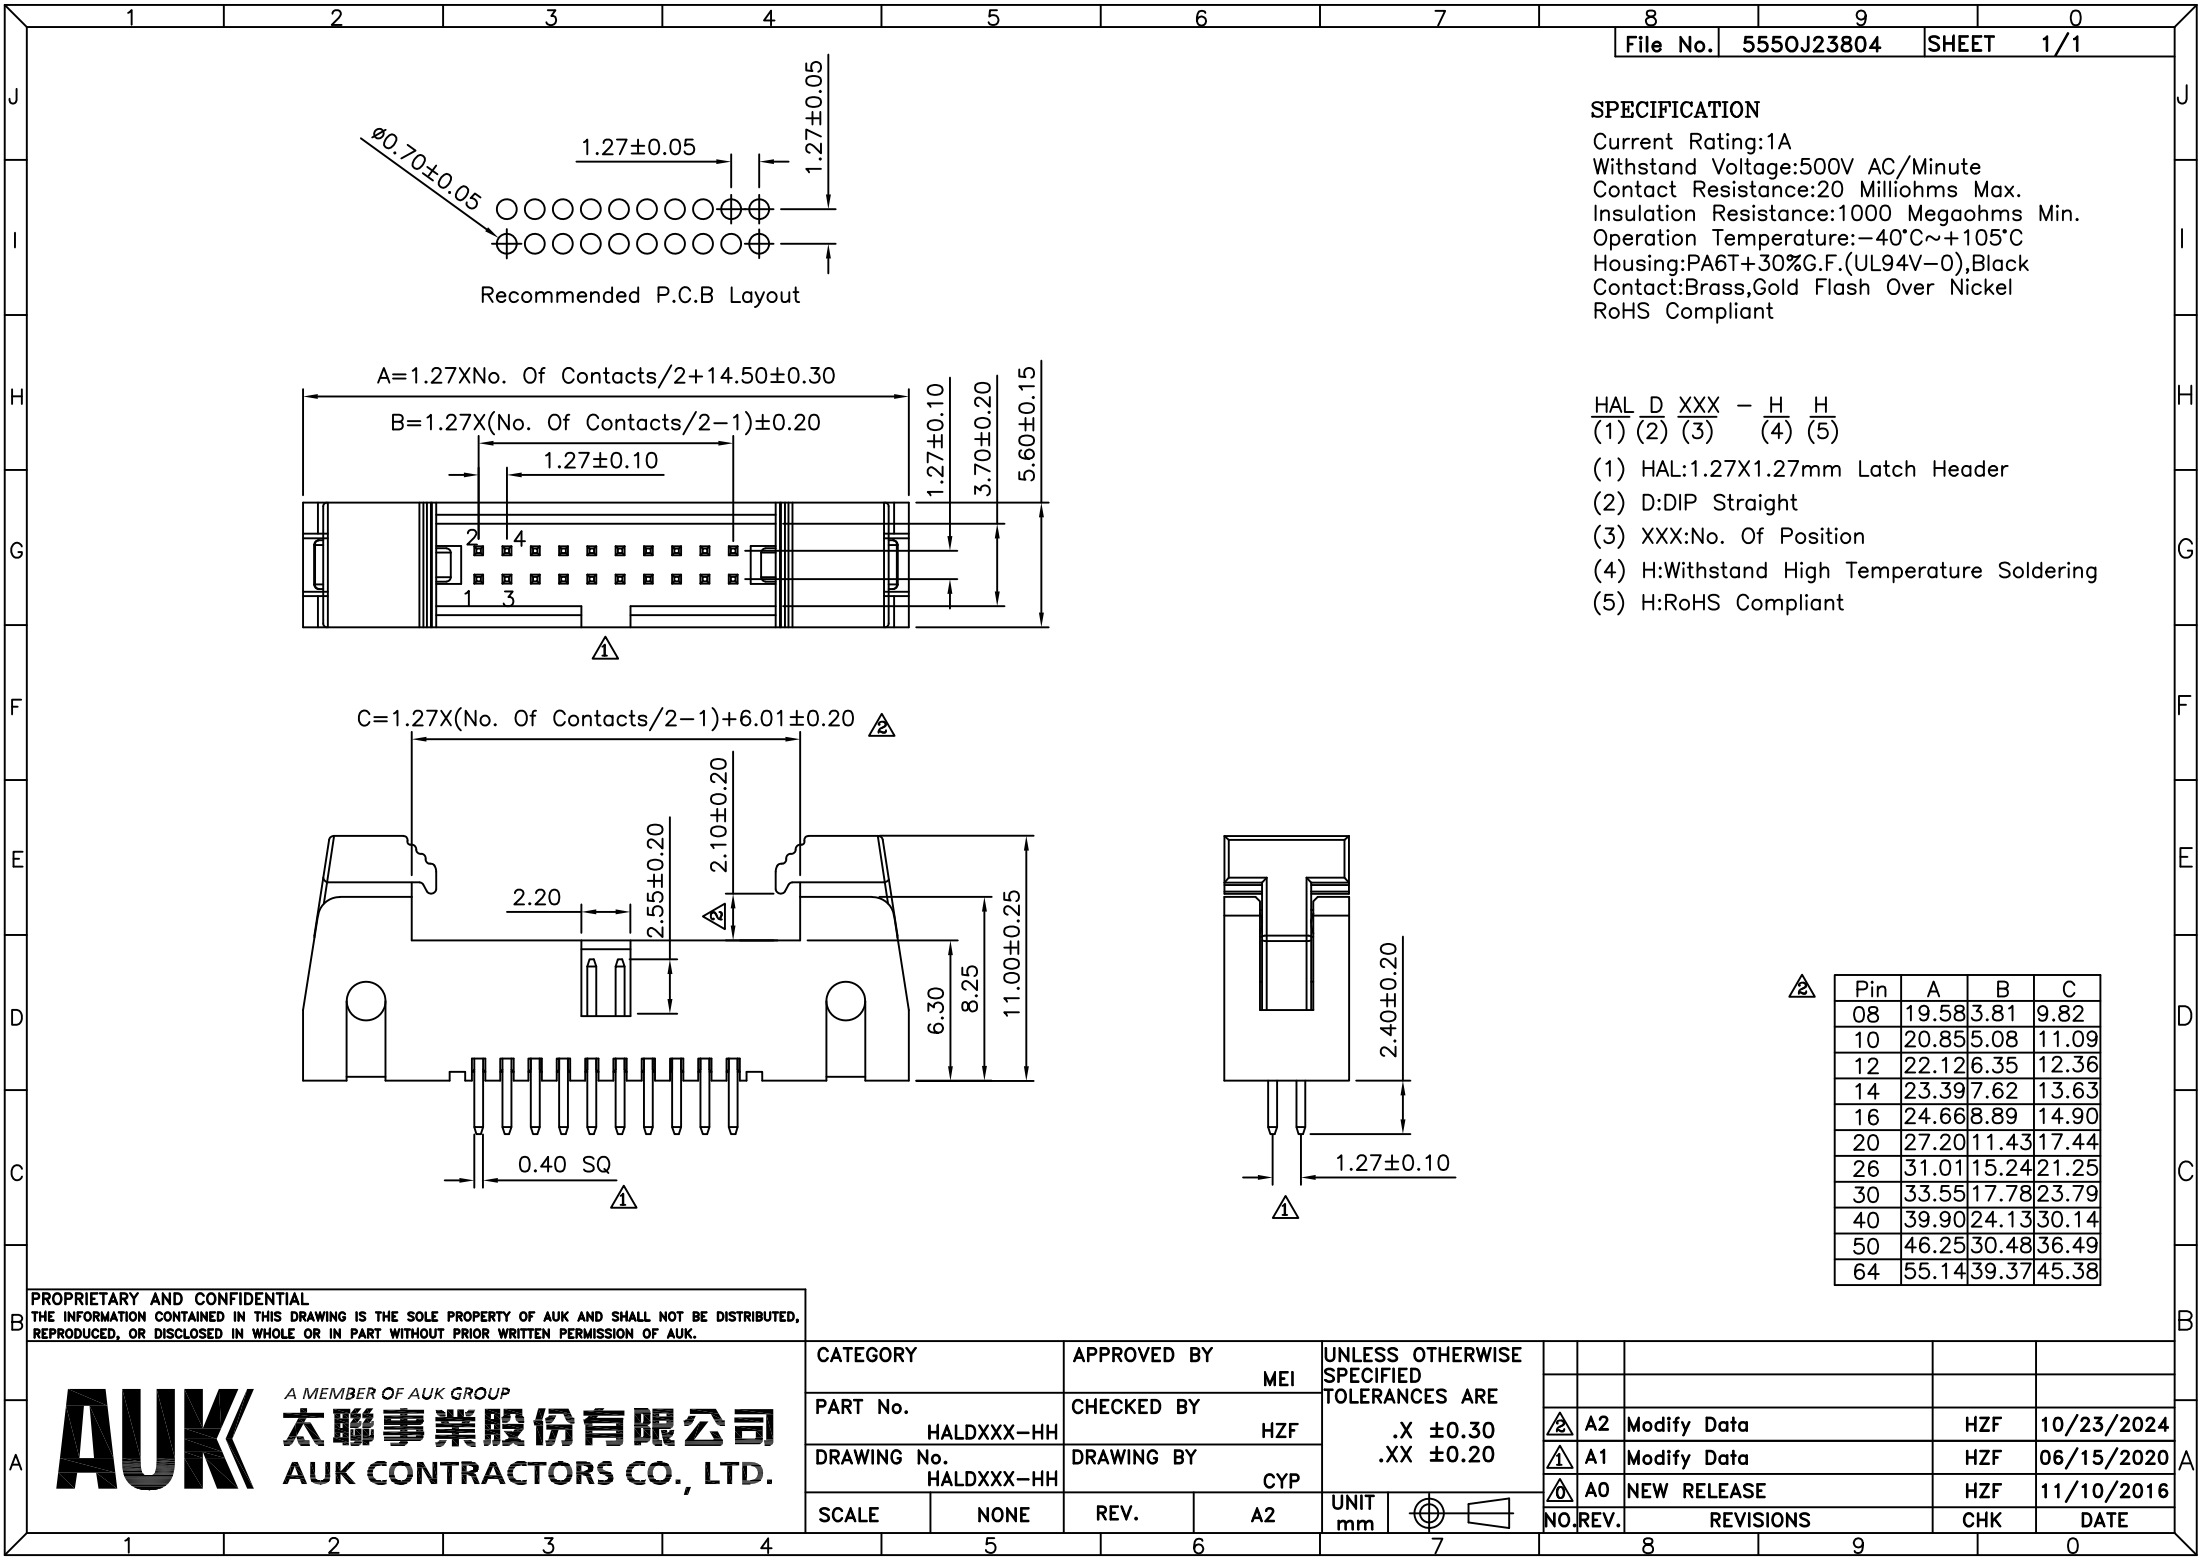

SPECIFICATION
Current Rating:1A
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

- HAL D XXX - H H
(1) (2) (3) (4) (5)
- (1) HAL:1.27X1.27mm Latch Header
 - (2) D:DIP Straight
 - (3) XXX:No. Of Position
 - (4) H:Withstand High Temperature Soldering
 - (5) H:RoHS Compliant

Pin	A	B	C
08	19.58	3.81	9.82
10	20.85	5.08	11.09
12	22.12	6.35	12.36
14	23.39	7.62	13.63
16	24.66	8.89	14.90
20	27.20	11.43	17.44
26	31.01	15.24	21.25
30	33.55	17.78	23.79
40	39.90	24.13	30.14
50	46.25	30.48	36.49
64	55.14	39.37	45.38

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20							
PART No. HALDXXX-HH		CHECKED BY HZF					A2	Modify Data		HZF	10/23/2024
DRAWING No. HALDXXX-HH		DRAWING BY CYP					A1	Modify Data		HZF	06/15/2020
							A0	NEW RELEASE		HZF	11/10/2016
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS		CHK	DATE	