

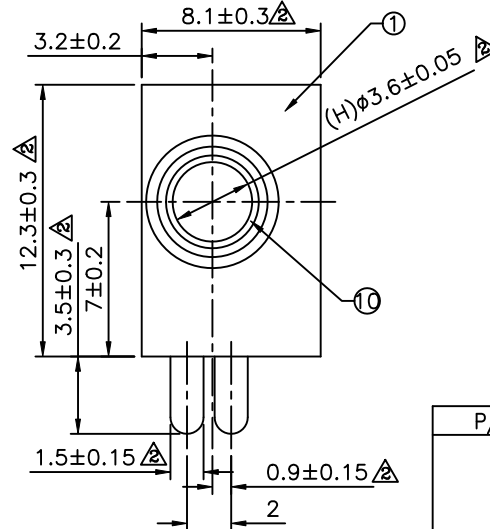



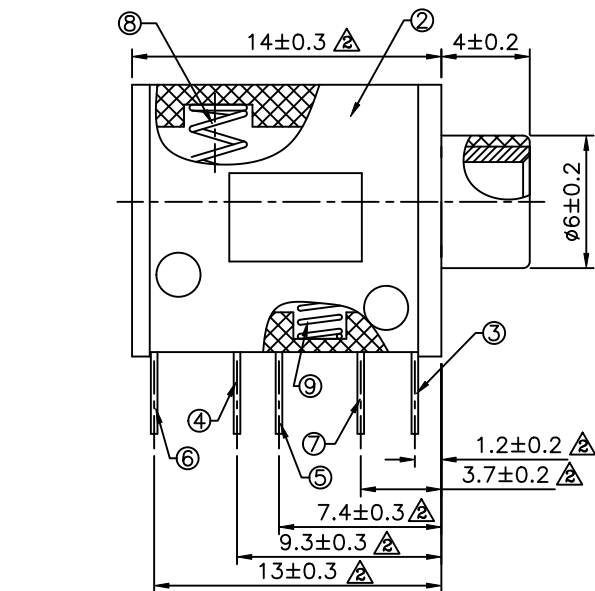


2 SPECIFICATION

Rating: DC 30V,0.5A Contact Resistance: 30 Milliohms Max. After Test: 50 Milliohms Max. Insulation Resistance: 100 Megaohms Min.(500V DC) After Test: 50 Megaohms Min. Withstand Voltage: 500V AC Operation Temperature Range: -20°C~+70°C RoHS Compliant
--

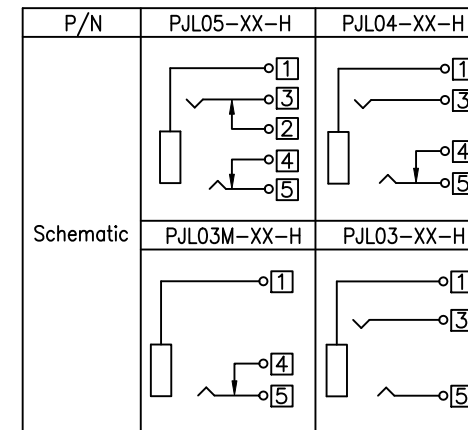

PJ (1)	L (2)	XX (3)	X – (4)	XX – (5)	H (6)
(1) PJ:Ø3.5					Earphone Jack
(2) L:	Longer Profile				
(3) XX:	No. Of Position				
(4) X:	Position				
	Blank:	Stereo			
	M:	Mono			
(5) XX:	Insulator Color				
	Blank:	Black			
	LB:	Light Blue			
	LM:	Lime			
	PK:	Pink			
	OR:	Orange			
(6) H:	RoHS Compliant				

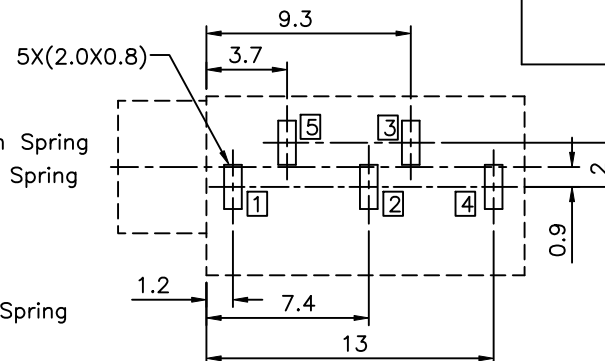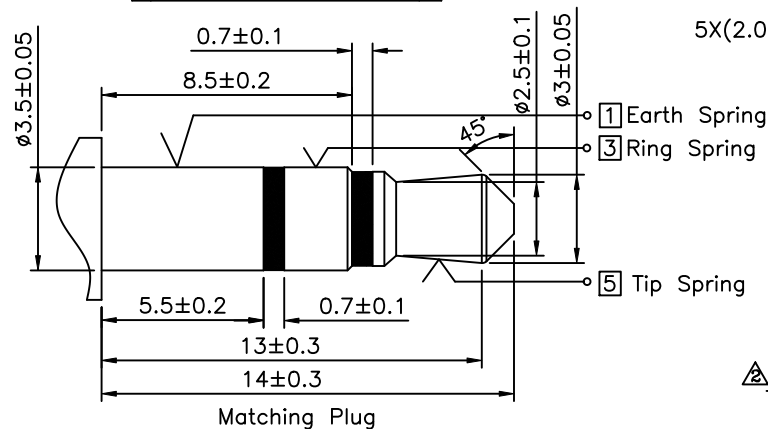

△₂ Recommended P.C.B. Layout(Top View)

Unspecified Tolerance:±0.05

○:Item No. □:Terminal No.

△	⑩	Bushing		Brass	Nickel Plated
	⑨	Spring-2	1	Spring Wire	Nickel Plated
	⑧	Spring-1	1	Spring Wire	Nickel Plated
	⑦	Tip Spring	5	Phosphor Bronze	Tin Plated
	⑥	Shunt Terminal-2	4	Brass	Tin Plated
	⑤	Shunt Terminal-1	2	Brass	Tin Plated
	④	Ring Spring	3	Phosphor Bronze	Silver Plated
	③	Earth Terminal	1	Brass	Tin Plated
	②	Cover	1	PBT	—
	①	Housing	1	PBT	—
	No.	Description	Q'ty	Material	Remark

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

[illegible]