
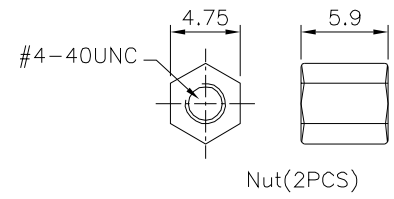
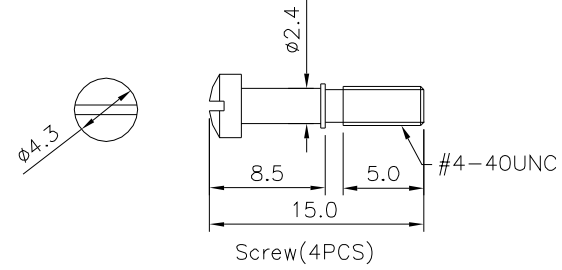
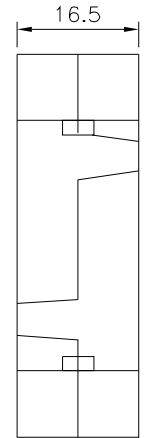
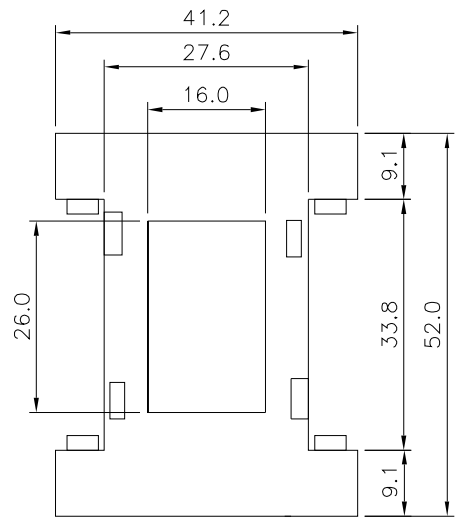


**SPECIFICATION**  
 Insulator:ABS(UL94HB)  
 Screw:Steel,Chrome Plated  
 RoHS Compliant



- A DD 1515 E Q - XX - 1 - H  
 (1) (2) (3) (4) (5) (6) (7) (8)
- (1) A:Adaptor Connector
  - (2) DD:D-SUB To D-SUB
  - (3) 1515:15 Pin To 15 Pin
  - (4) E:Male To Female
  - (5) Q:Quick-On Hood
  - (6) XX:Insulator Color  
 Blank:Gray  
 CH:Chrome Plated  
 BK:Black  
 BE:Beige
  - (7) 1:Single Pack(Poly Bag)
  - (8) H:RoHS Compliant

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED,  
 REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.3 .XX ±0.2 ANG. ±5°				
PART No. ADD1515EQ-XX-1-H		MEI						
DRAWING No. ADD1515EQ-XX-1-H		HZF						
SCALE NONE		CYP						
REV.	A0	UNIT mm	6	7	△ A0	NEW RELEASE	HZF	08/27/2019
NO.	REV.	REVISIONS	CHK	DATE				