


Pin No.	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

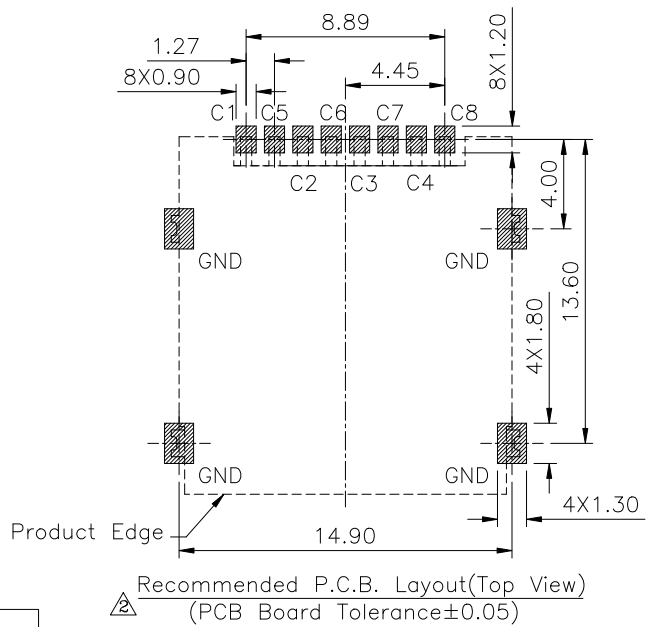

△△△ SPECIFICATION

- 1. Material & Finish**
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 Insulator: LCP(UL94V-0), Black
 Shell: Stainless Steel, Nickel Plated Over All
- 2. Electrical Characteristics**
 Current Rating: 0.5A
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: 100 Milliohms Max.
 Insulation Resistance:
 Unmated: 1000 Megohms Min.
 Mated: 100 Megohms Min.
- 3. Mechanical Characteristics**
 Mating Cycle: 3000 Cycles
 Contact Retention: 50gf/Pin Min.
- 4. Environmental Characteristics**
 Operation Temperature: -25°C ~ +70°C
- 5. RoHS Compliant**

△ MCS V 08 15 - W 0 1 - R1K2E - H
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

- (1) MCS: Micro SIM Connector
- (2) V: Hinged Cover
- (3) 08: No. Of Position
- (4) 15: H=1.5mm
- (5) W: SMT Right Angle
- (6) 0: Standoff 0mm
- (7) 1: Normal Type
- (8) R1K2E: Tape & Reel 1250 PCS/Reel
- (9) H: RoHS Compliant

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.



CATEGORY		APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.45 X.* ±5* .X ±0.35 .X.* ±2* .XX ±0.25 .XX.* ±1* .XXX ±0.15 .XXX.* ±0.5*	△ A4	Modify Spec.	HZF	12/19/2022
PART No. △1 MCSV0815W01-R1K2E-H		MEI		△ A3	Modify Data	HZF	05/20/2020
DRAWING No. MCSV0815W01-R1K2E-H		CHECKED BY	△ A2	Modify Data	HZF	10/31/2017	
SCALE		DRAWING BY	△ A1	Modify P/N: MCS08W01-HC-R1K2E-H --> MCSV0815W01-R1K2E-H	HZF	09/14/2016	
NONE	REV.	A4	△ A0	NEW RELEASE	HZF	02/03/2016	
UNIT mm		NO. REV.	REVISIONS		CHK	DATE	