


**SPECIFICATION:**  
 Insulation Resistance:1000Megohms Min  
 Withstand Voltage:1000V AC/Minute  
 Durability:600Mating Circles Min  
 RoHS Compliant

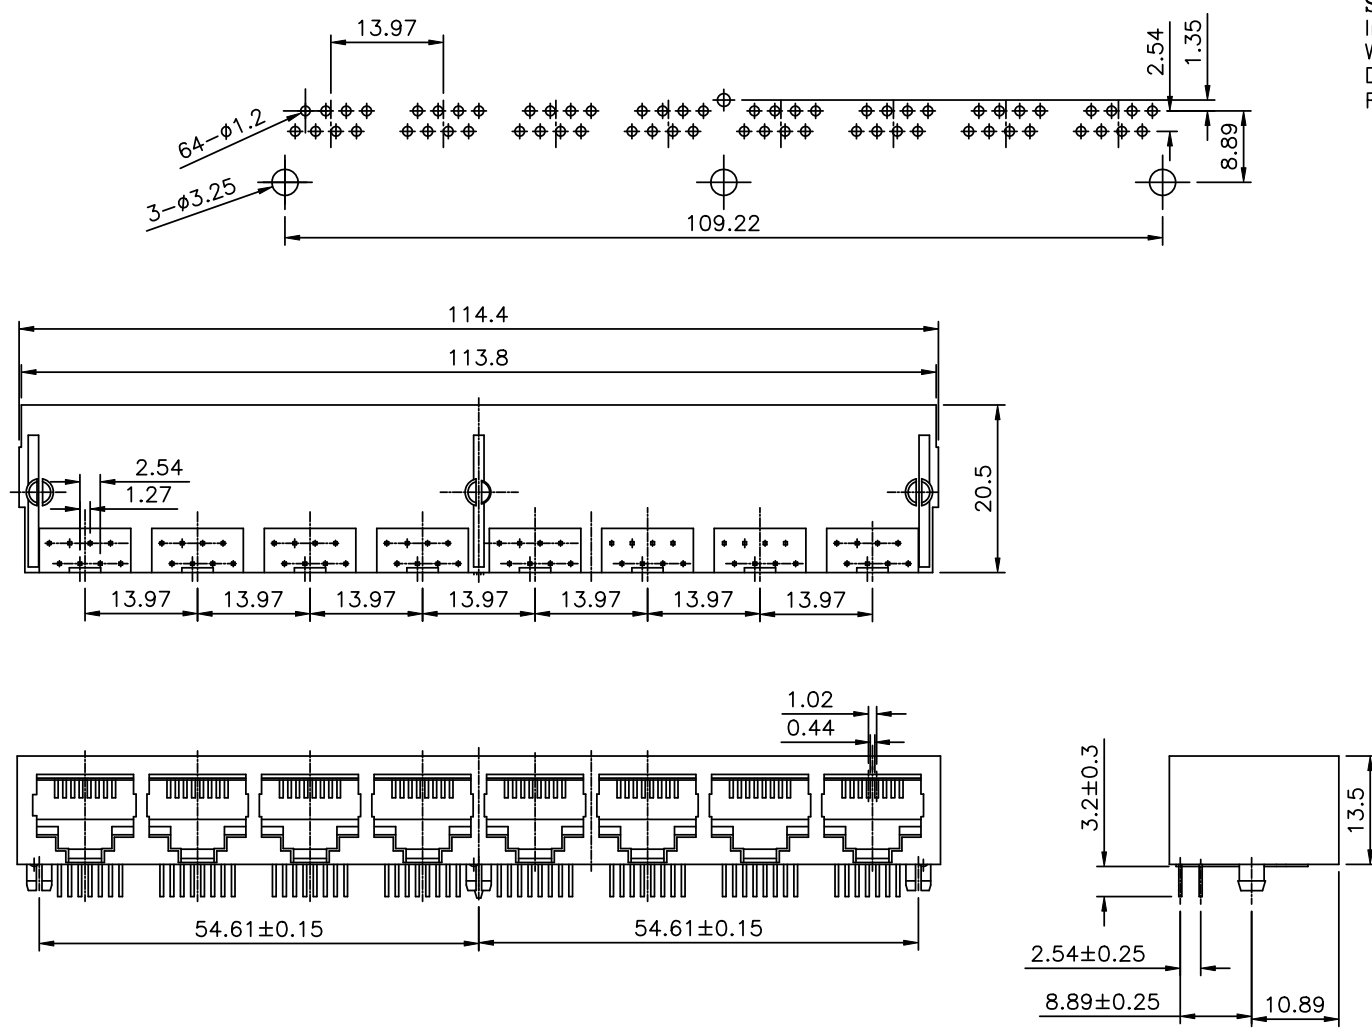

3	Shielding	1	Copper Alloy	0.25mm Thickness Nickel Plated
2	Pin	64	Phosphor Bronze	Selective Gold-Plating Over Nickel
1	Housing	1	PBT	UL94V-0
No.	Part Name	Q'ty	Material	Remark

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0~10 ±0.1 10~20 ±0.15 20~30 ±0.2
PART No. MJF0808X08KXX-H		MEI		
DRAWING No. MJF0808X08KXX-H		CHECKED BY HZF		
SCALE		DRAWING BY PEGA		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	01/19/2008