


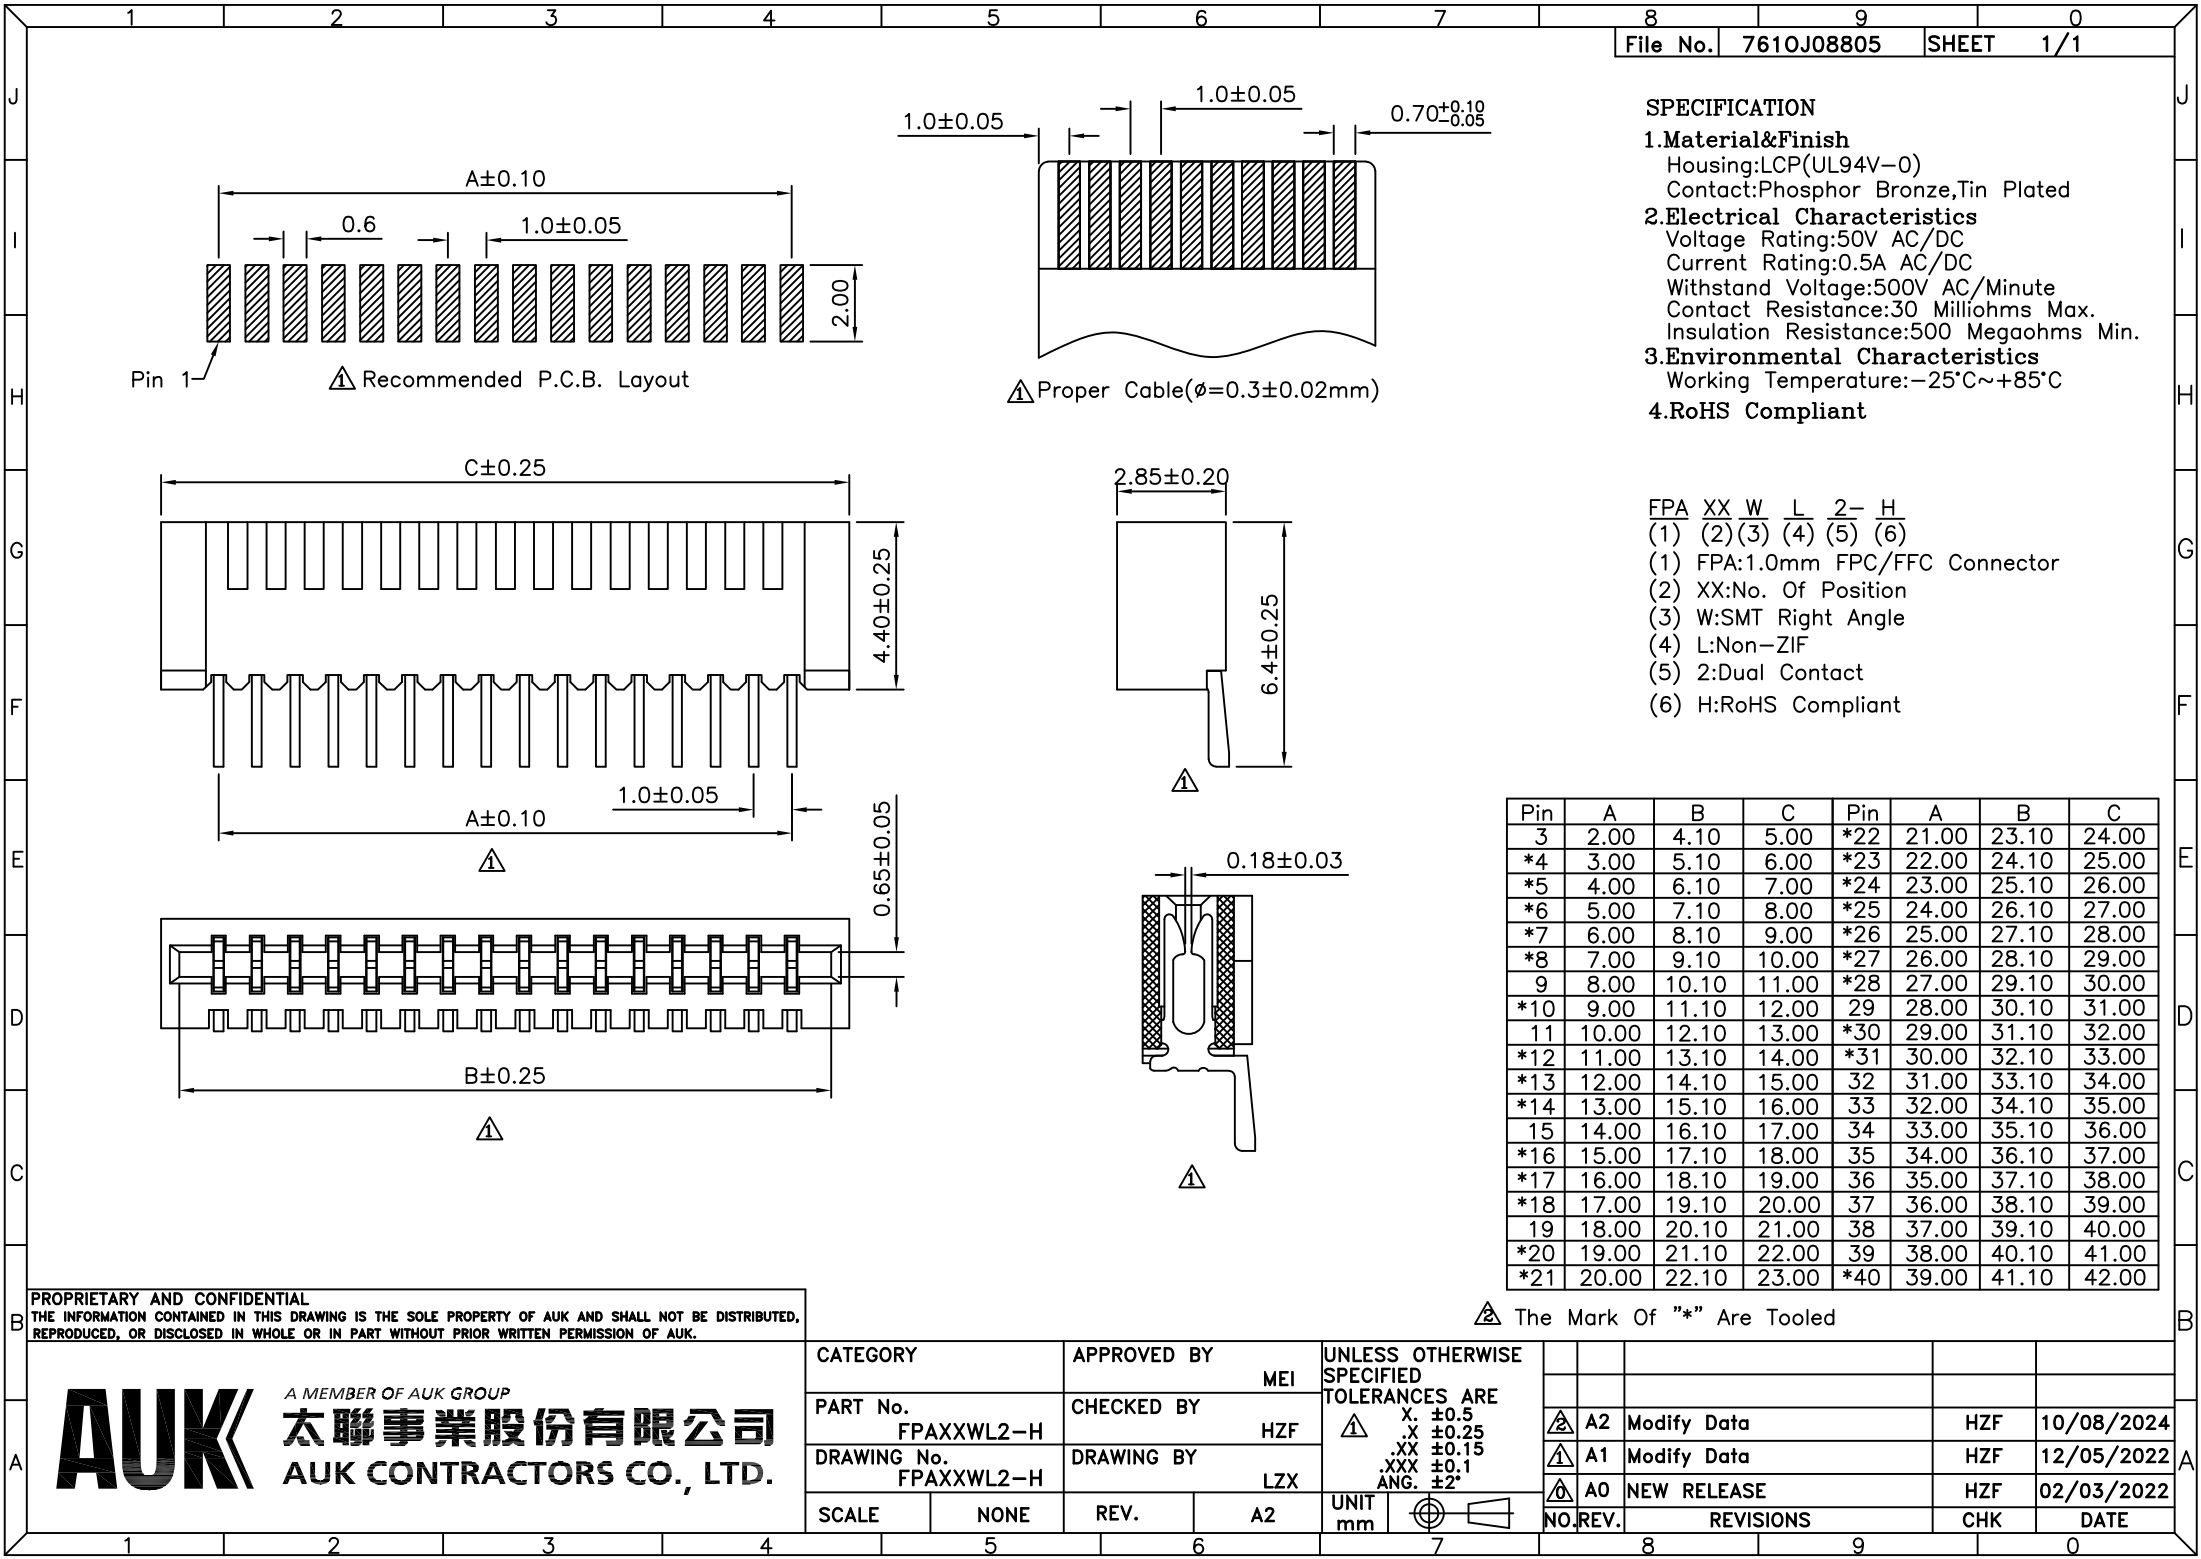

SPECIFICATION

- 1.Material&Finish**
Housing:LCP(UL94V-0)
Contact:Phosphor Bronze,Tin Plated
- 2.Electrical Characteristics**
Voltage Rating:50V AC/DC
Current Rating:0.5A AC/DC
Withstand Voltage:500V AC/Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
- 3.Environmental Characteristics**
Working Temperature:-25°C~+85°C
- 4.RoHS Compliant**

FPA XX W L 2- H
(1) (2)(3) (4) (5) (6)
(1) FPA:1.0mm FPC/FFC Connector
(2) XX:No. Of Position
(3) W:SMT Right Angle
(4) L:Non-ZIF
(5) 2: Dual Contact
(6) H:RoHS Compliant

Pin	A	B	C	Pin	A	B	C
3	2.00	4.10	5.00	*22	21.00	23.10	24.00
*4	3.00	5.10	6.00	*23	22.00	24.10	25.00
*5	4.00	6.10	7.00	*24	23.00	25.10	26.00
*6	5.00	7.10	8.00	*25	24.00	26.10	27.00
*7	6.00	8.10	9.00	*26	25.00	27.10	28.00
*8	7.00	9.10	10.00	*27	26.00	28.10	29.00
9	8.00	10.10	11.00	*28	27.00	29.10	30.00
*10	9.00	11.10	12.00	29	28.00	30.10	31.00
11	10.00	12.10	13.00	*30	29.00	31.10	32.00
*12	11.00	13.10	14.00	*31	30.00	32.10	33.00
*13	12.00	14.10	15.00	32	31.00	33.10	34.00
*14	13.00	15.10	16.00	33	32.00	34.10	35.00
15	14.00	16.10	17.00	34	33.00	35.10	36.00
*16	15.00	17.10	18.00	35	34.00	36.10	37.00
*17	16.00	18.10	19.00	36	35.00	37.10	38.00
*18	17.00	19.10	20.00	37	36.00	38.10	39.00
19	18.00	20.10	21.00	38	37.00	39.10	40.00
*20	19.00	21.10	22.00	39	38.00	40.10	41.00
*21	20.00	22.10	23.00	*40	39.00	41.10	42.00

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
PART No.		CHECKED BY					
DRAWING No.		DRAWING BY					
SCALE		REV.		UNIT		NO. REV.	
NONE		A2		mm		REVISIONS	
						CHK	
						DATE	