
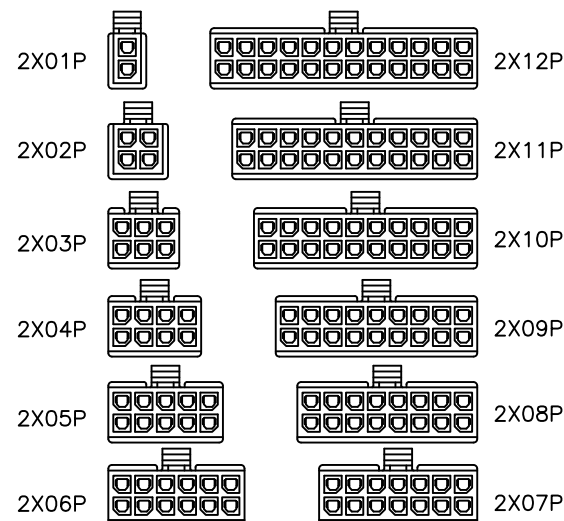
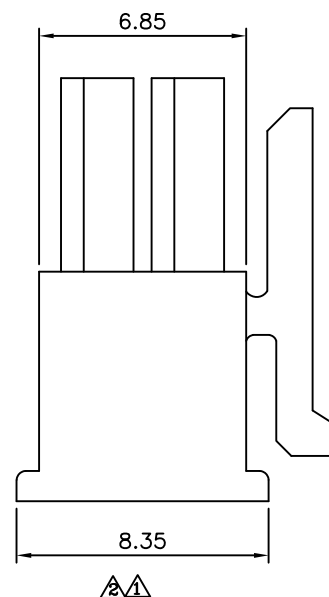
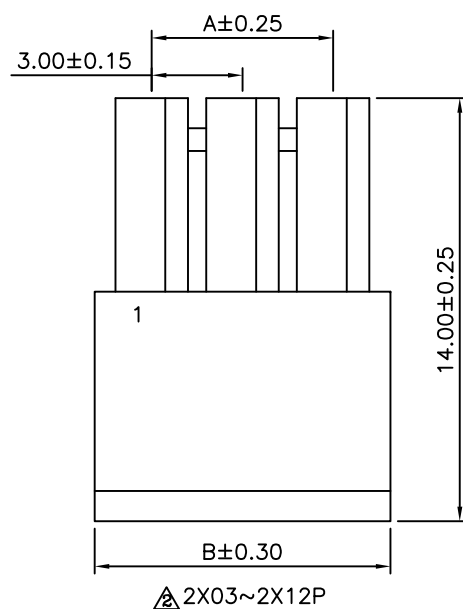
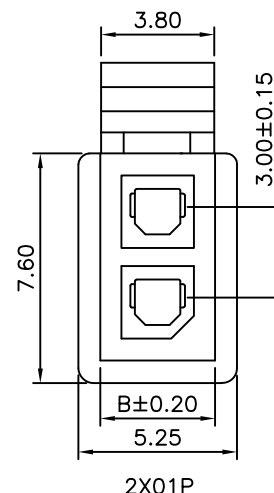
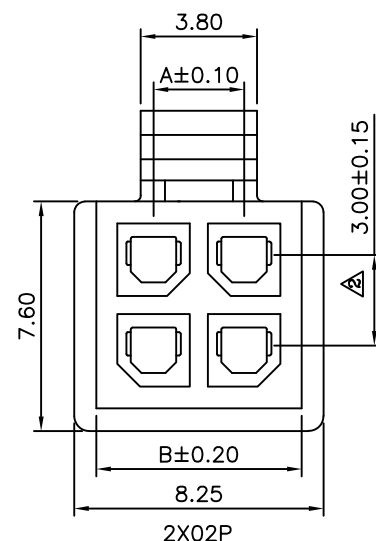


△ SPECIFICATION

1. **Material&Finish**
Insulator:PA66,Black
2. **Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
3. **Environmental Characteristics**
Temperature Range:-25°C~+85°C
4. **RoHS Compliant**

MIF 2 X XX SH - XX - H
(1) (2) (3) (4) (5) (6)
(1) MIF:3.0mm Micro-Fit Series
(2) 2: Dual Row
(3) XX: No. Of Position/Per Row
(4) SH: Female Housing
(5) XX: Flame Retardant
Blank: UL94V-2
V0: UL94V-0
(6) H: RoHS Compliant

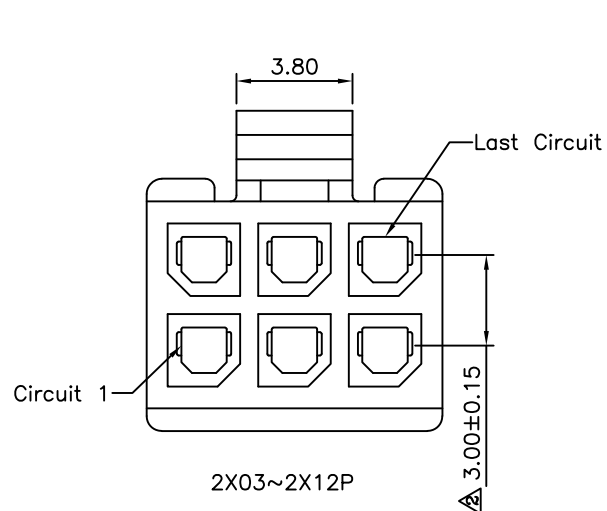

Pin	A	B
02		3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°					
		MEI							
PART No.		CHECKED BY							
MIF2XXXSH-XX-H		HZF							
DRAWING No.		DRAWING BY							
MIF2XXXSH-XX-H		CYP							
SCALE		NONE		UNIT					
		REV.		B2					
				mm					
									
						NO. REV.		REVISIONS	
								CHK	
								DATE	