

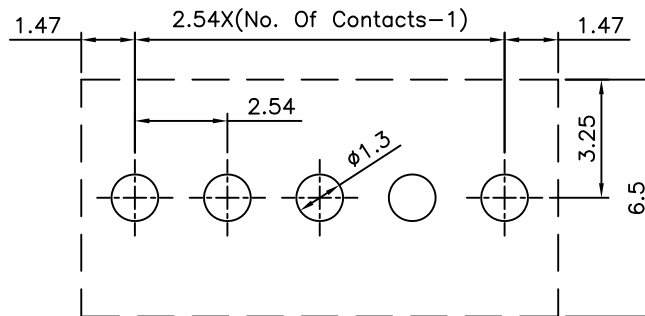
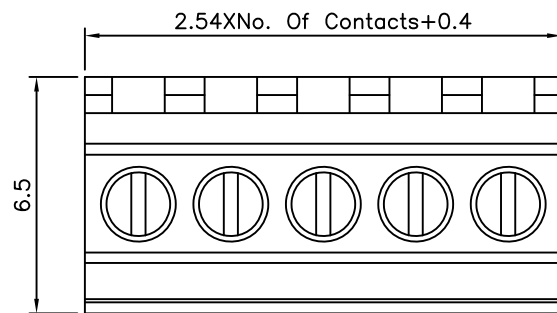


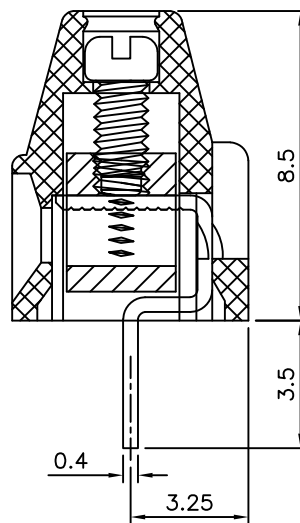

Recommended P.C.B. Layout

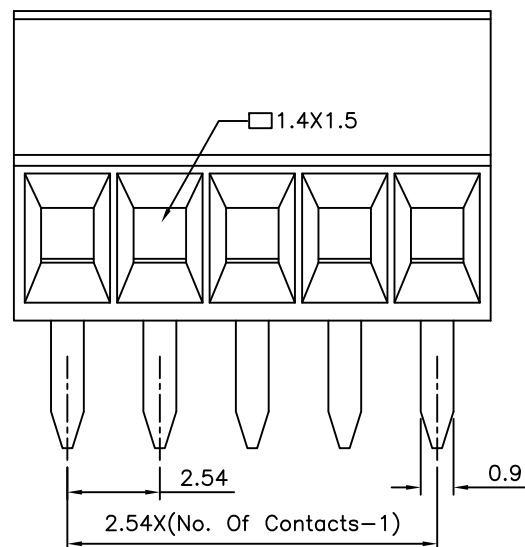

△ SPECIFICATION

Voltage Rating:150V AC
 Current Rating:6A/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2000V AC For 1 Minute
 Test Time=60s/1 PCS

Wire Range:18~30 AWG
 Torque:1.5 Kgf.cm/M1.6
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5s Max.

Contact:Copper Alloy,Nickel Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide(UL94V-0)
 RoHS Compliant

△ TB25 XX A - XX -H
 (1) (2) (3) (4) (5)

- (1) TB25:2.54mm Terminal Block
 Rising Clamp Type
 (2) XX:No. Of Position/Per Row
 (3) A:Height=8.5mm
 (4) XX:Insulator Color
 Blank:Green
 BK:Black
 GE:Grey
 (5) H:RoHS Compliant

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED,
 REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°						
PART No. △ TB25XXA-XX-H		EMILY			△ A3	Modify P/N:TB25XXA-H --> TB25XXA-XX-H		HZF	03/21/2014	
DRAWING No. TB25XXA-XX-H		CHECKED BY HZF			△ A2	Modify Data		HZF	09/14/2013	
		DRAWING BY SAN			△ A1	Modify Data		HZF	07/22/2013	
					△ A0	NEW RELEASE		HZF	07/26/2009	
SCALE	NONE	REV.	A3	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE