


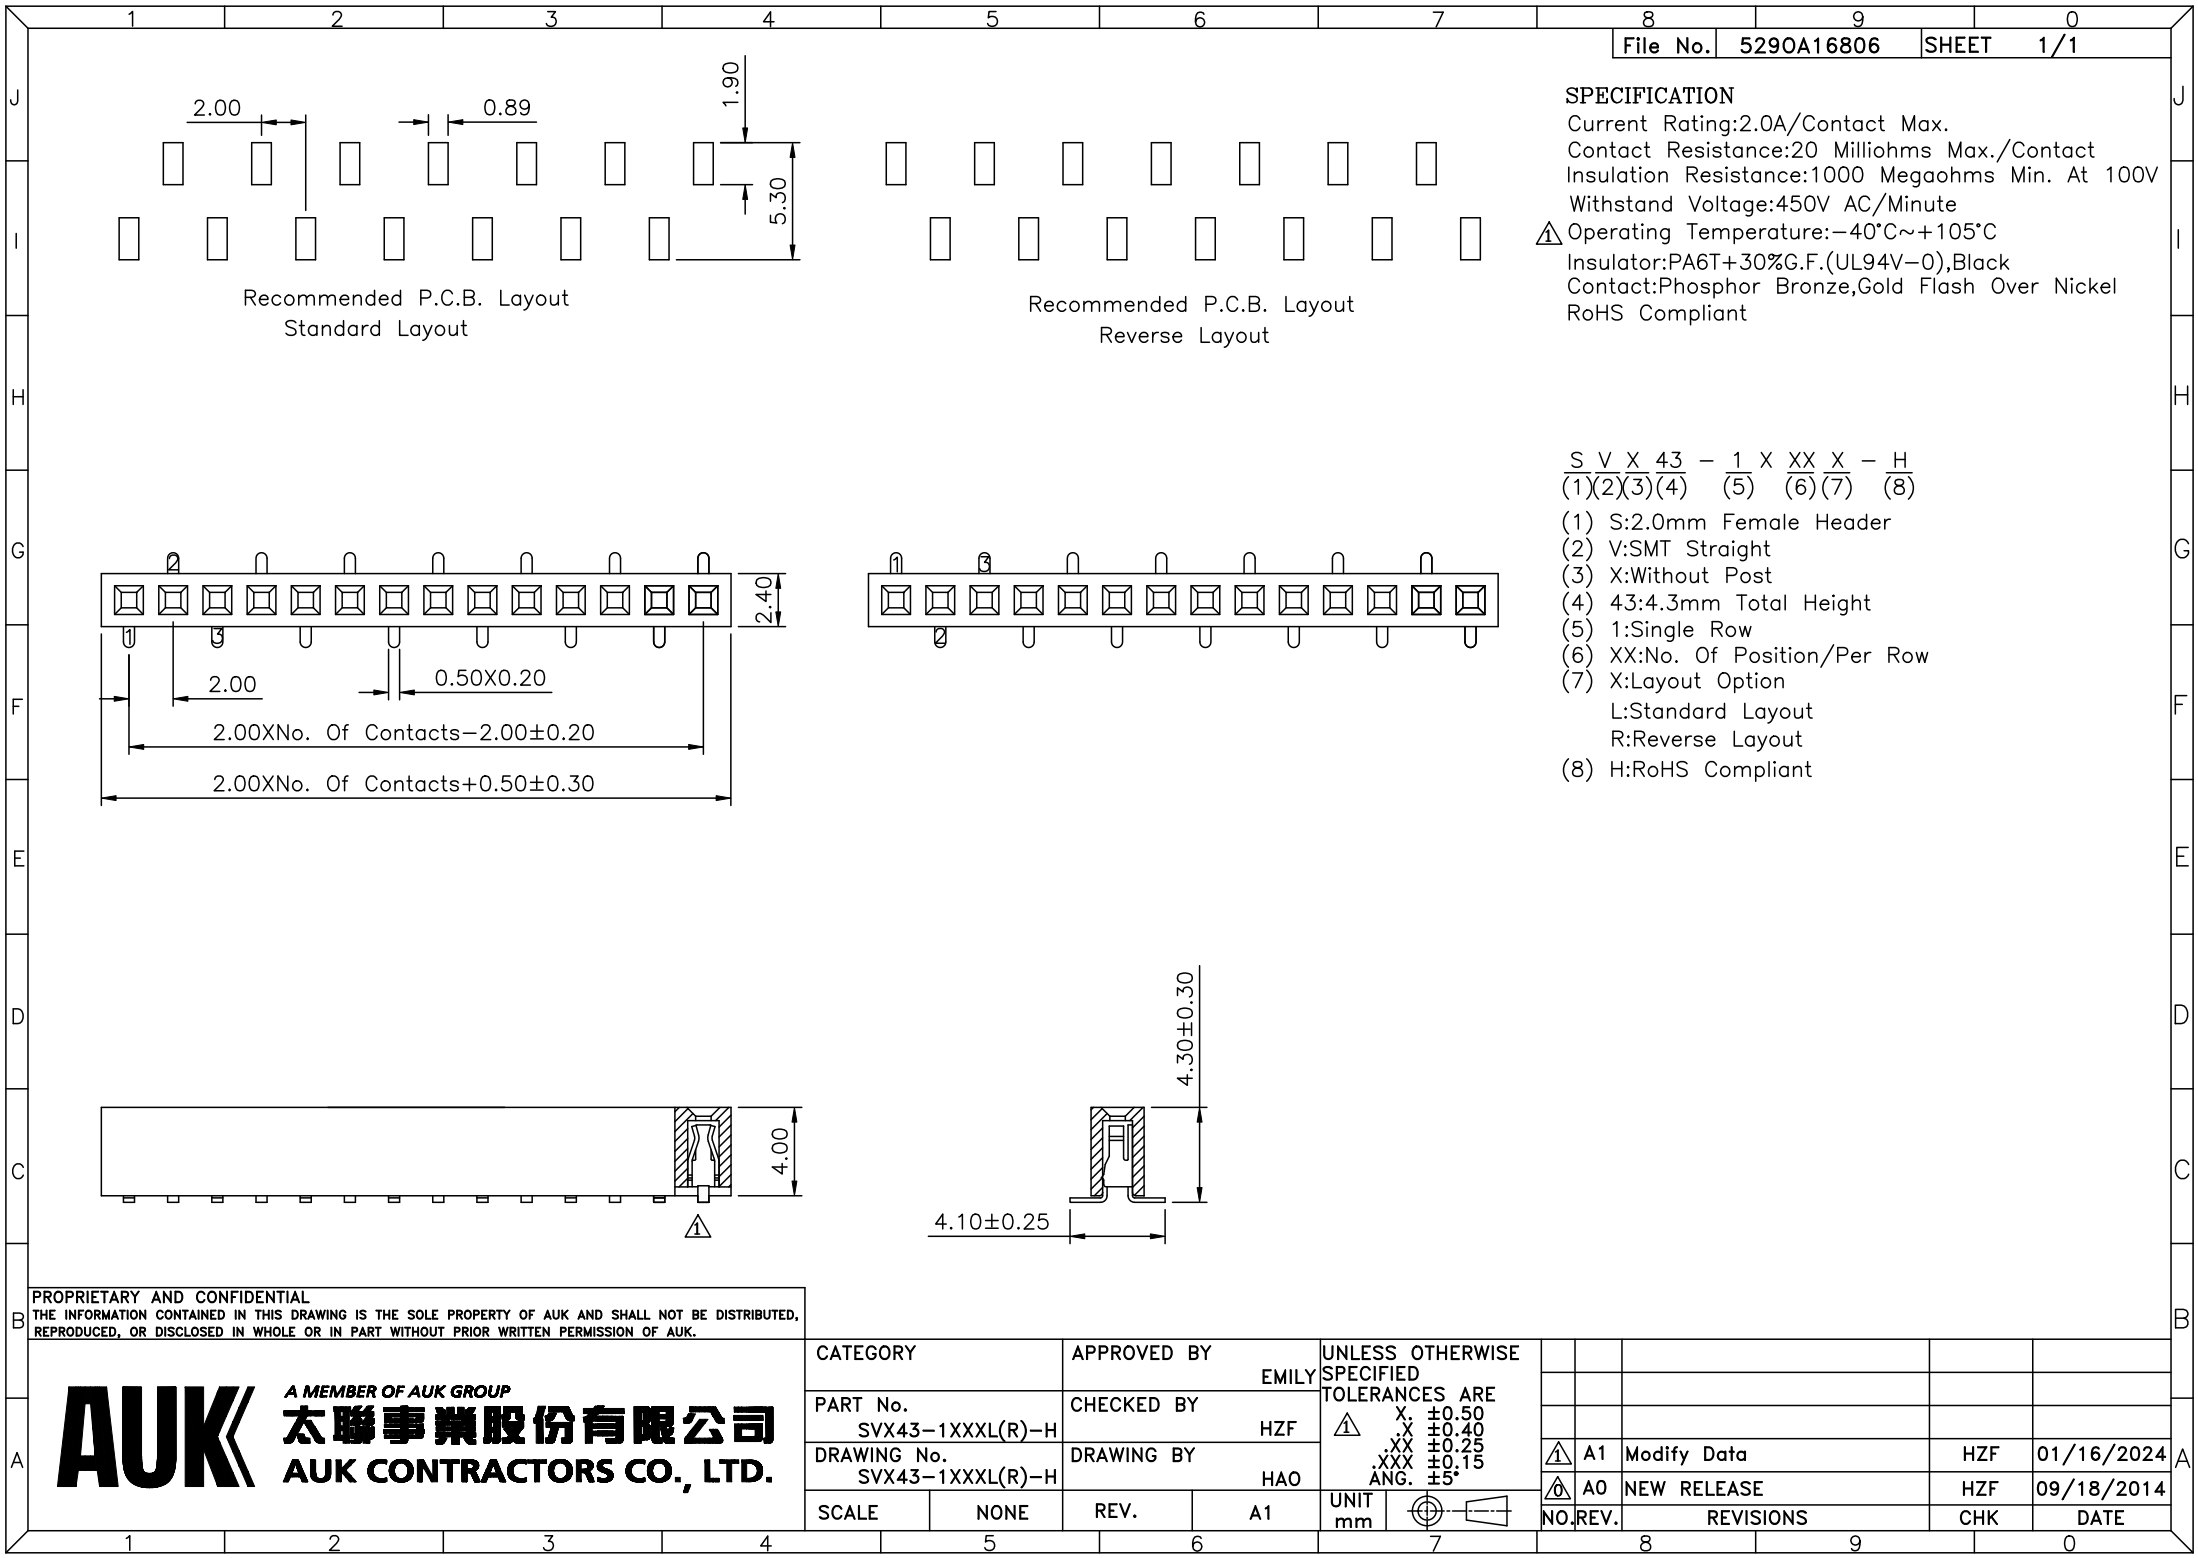

SPECIFICATION

Current Rating:2.0A/Contact Max.
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Withstand Voltage:450V AC/Minute
Operating Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

S V X 43 - 1 X XX X - H
(1)(2)(3)(4) (5) (6)(7) (8)

- (1) S:2.0mm Female Header
- (2) V:SMT Straight
- (3) X:Without Post
- (4) 43:4.3mm Total Height
- (5) 1:Single Row
- (6) XX:No. Of Position/Per Row
- (7) X:Layout Option
L:Standard Layout
R:Reverse Layout
- (8) H:RoHS Compliant

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED,
REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.40 XXX ±0.25 XXX ±0.15 ANG. ±5°						
PART No.		CHECKED BY								
DRAWING No.		DRAWING BY								
SCALE		REV.								
NONE		A1		UNIT		NO.	REV.	REVISIONS	CHK	DATE
				mm						