







△ SPECIFICATION
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Insulator: PA66(UL94V-0)
 RoHS Compliant

△ XH XX H - XX - H
 (1) (2) (3) (4) (5)

(1) XH: 2.5mm XH Series
 (2) XX: No. Of Position
 (3) H: Female Housing
 (4) XX: Insulator Color
 Blank: Nature
 BK: Black
 BL: Blue
 RD: Red
 YL: Yellow
 (5) H: RoHS Compliant

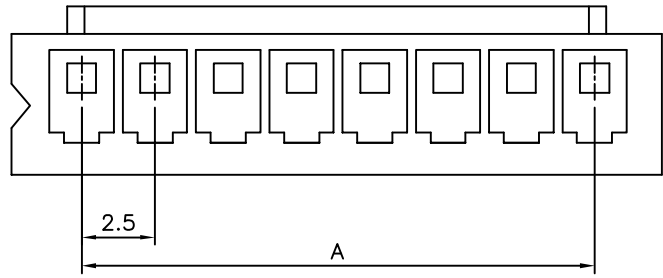

△ 2 Pin

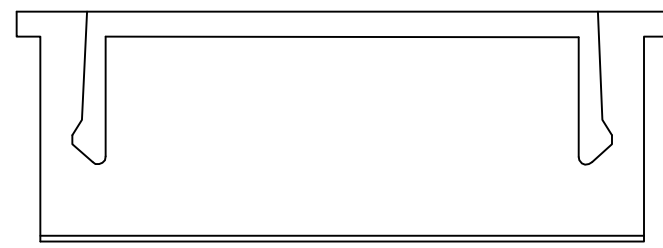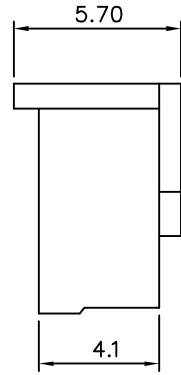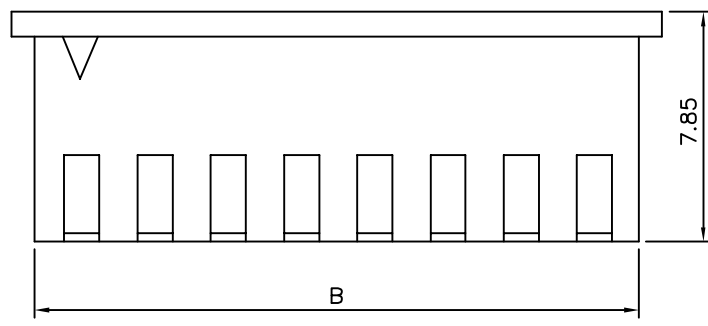

△ 3~20 Pin

Pin	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70
20	47.50	50.70

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 △ .XX ±0.20
PART No. XHXXH-XX-H △		MEI		
DRAWING No. XHXXH-XX-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY YBL		
REV.	A3	UNIT mm		

NO. REV.	REVISIONS	CHK	DATE
△ A3	Modify P/N: XHXXH-H --> XHXXH-XX-H	HZF	12/04/2013
△ A2	Modify Data	HZF	03/24/2010
△ A1	Modify Data	BECKY	2004/11/19
△ A0	NEW RELEASE		