

△ SPECIFICATION

Impedance:50 Ohms

Frequency Range:DC 0-6 GHz

△ Working Voltage:170V AC

Withstand Voltage:500V AC/Minute

Insulation Resistance:1000 Megaohms Min. At DC 500V

Contact Resistance:Center Contact:5.0 Milliohms Max.

Outer Contact:2.5 Milliohms Max.

At DC 10mA

VSWR:1.3 Max.

Temperature Range:-40°C To +85°C

RoHS Compliant

△ MMCX - P C R XXX 50 - H
(1) (2) (3) (4) (5) (6) (7)

(1) MMCX:MMCX Connector

(2) P:Plug

(3) C:Crimp Type

(4) R:Right Angle Type

(5) XXX:Cable Group




174:RG174/U

188:RG188/U

316:RG316/U

(6) 50:50 Ohms

(7) H:RoHS Compliant

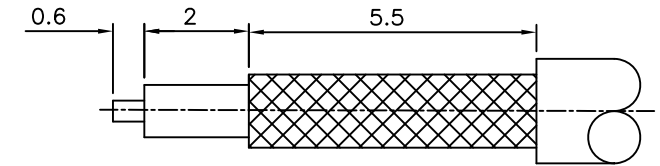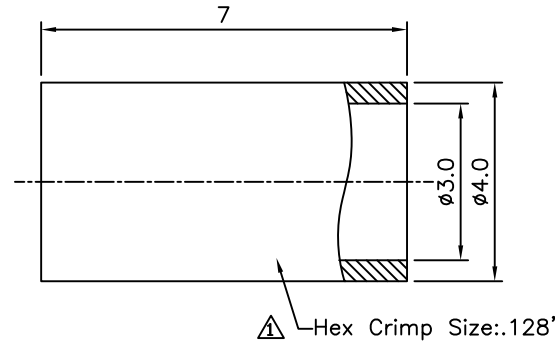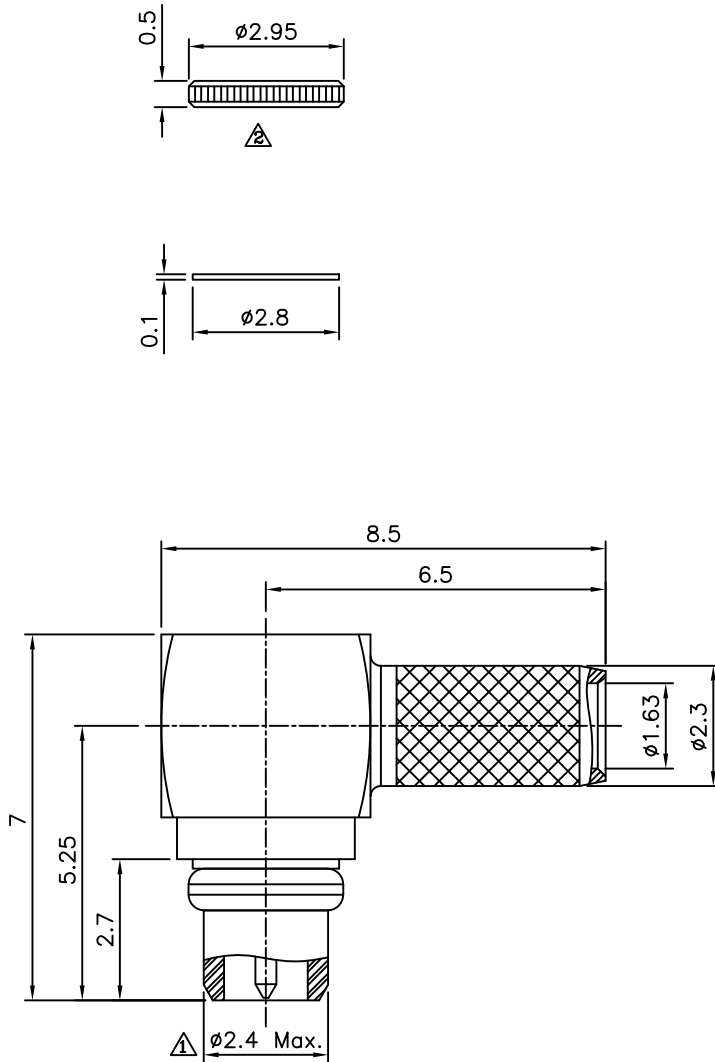

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED,
REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE							
		MEI									
PART No. 		CHECKED BY									
MMCX-PCRXX50-H		HZF		X. ±0.1			A2	Modify Data	HZF	11/09/2023	
DRAWING No.		DRAWING BY		.X ±0.1			A1	Modify P/N:MMCX-PCR31650-H -->MMCX-PCRXX50-H,Add 178	HZF	01/18/2021	
MMCX-PCRXX50-H		CYP		.XX ±0.1			A0	NEW RELEASE	HZF	12/05/2016	
SCALE	NONE	REV.	A2	UNIT			NO.	REV.	REVISIONS	CHK	DATE