File No.	3660F26237	SHEET	1/1

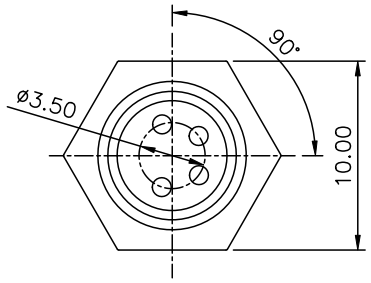

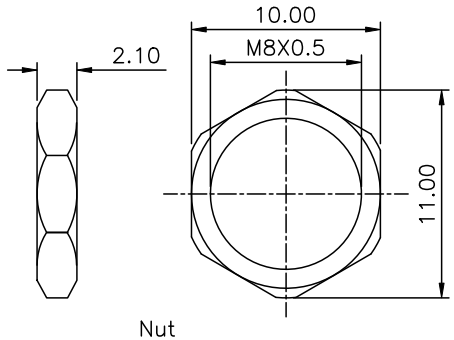

Nut

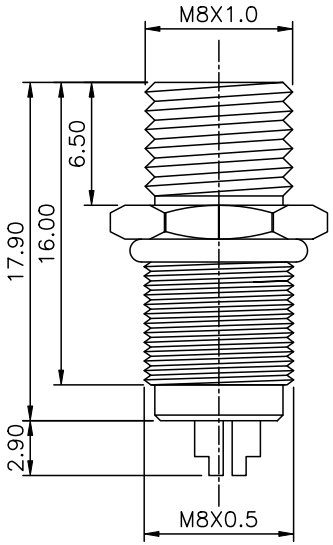

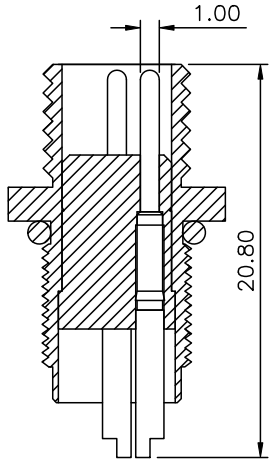

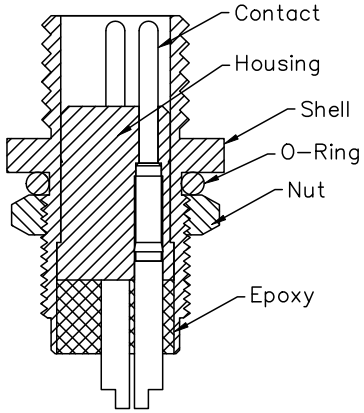



SPECIFICATION

Current Rating:5A
Voltage Rating:125V
Water Proof:IPX7
Operation Temperature:−40°C~105°C
Housing:PBT,Black
Contact:Brass,Gold Plated Over Nickel
Nut:Brass,Nickel Plated
Shell:Brass,Nickel Plated
O−Ring:NBR,Black
RoHS Compliant

M8 A R S − XX P S R − WP − H
(1)(2)(3)(4) (5)(6)(7)(8) (9) (10)

(1) M8:M Series Sensor Connector M8 Type
(2) A:A Coding
(3) R:Receptacle Type
(4) S:Screw Thread Mating Style
(5) XX:No. Of Position
(6) P:Male
(7) S:Solder Wire Type
(8) R:Front Fasten(Enclosure Rear Mount)
(9) WP:Waterproof Type
(10) H:RoHS Compliant



M8ARS−04PSR−WP−H



M8ARS−03PSR−WP−H



M8ARS−02PSR−WP−H

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No.	M8ARS−XXPSR−WP−H	CHECKED BY	HZF
DRAWING No.	M8ARS−XXPSR−WP−H	DRAWING BY	LSM
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.3
.XX ±0.20
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	12/26/2023