

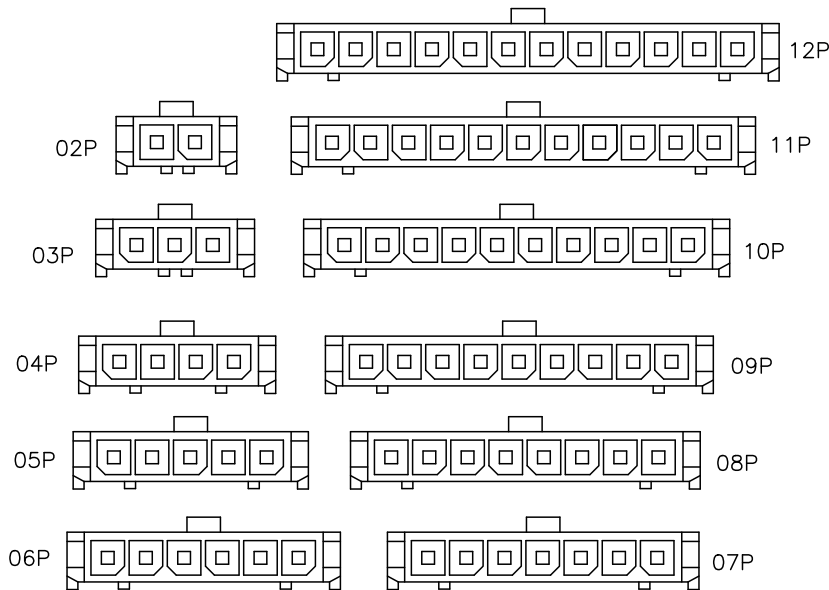
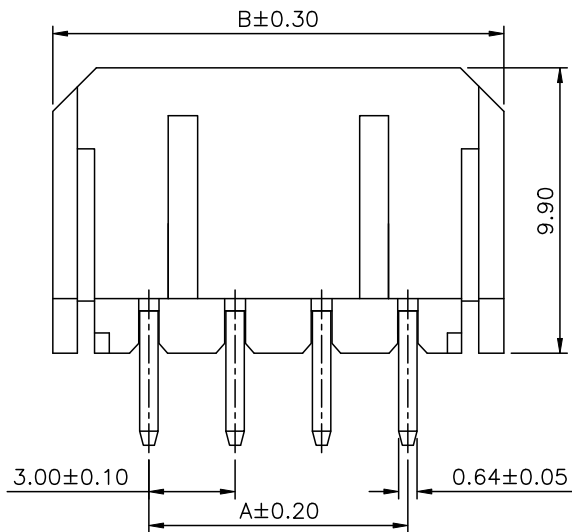


Recommended P.C.B Layout
Tolerance:±0.05(Top View)

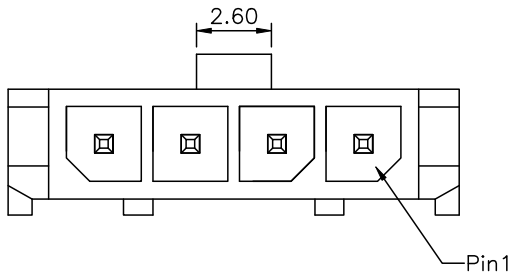

Pin Size Layout

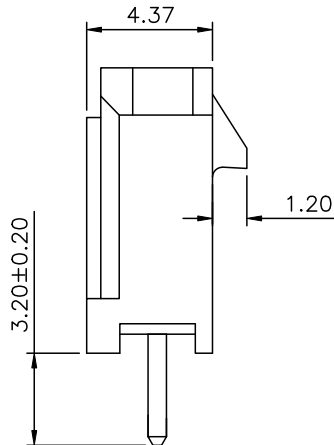

SPECIFICATION

1.Material&Finish

Housing:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated

2.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute

3.Environmental Characteristics

Temperature Range:-25°C~+85°C

4.RoHS Compliant

MIF 1 X XX P D - H
(1) (2) (3) (4) (5) (6)

- (1) MIF:3.0mm Micro Fit
- (2) 1:Single Row
- (3) XX:No. Of Position/Per Row
- (4) P:Male
- (5) D:DIP Straight
- (6) H:RoHS Compliant

Pin	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.30 Y ±0.25 XX ±0.20 XXX ±0.05 ANG. ±1°						
PART No.		CHECKED BY								
DRAWING No.		DRAWING BY								
MIF1XXXPD-H		MEI								
MIF1XXXPD-H		HZF								
LSM										
SCALE	NONE	REV.	A0	UNIT		NO.	REV.	NEW RELEASE	HZF	02/28/2024
						REVISIONS		CHK	DATE	