
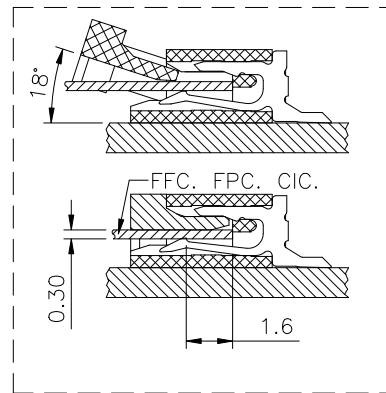
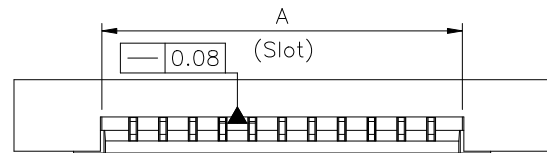


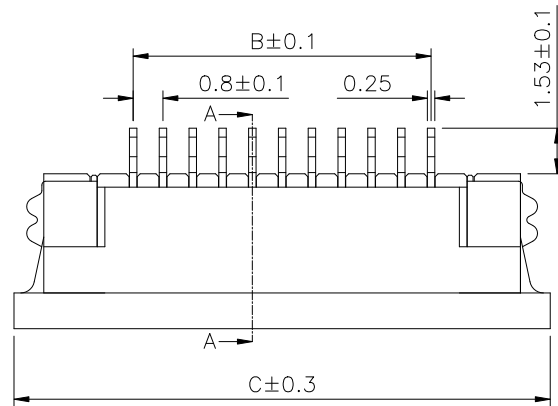
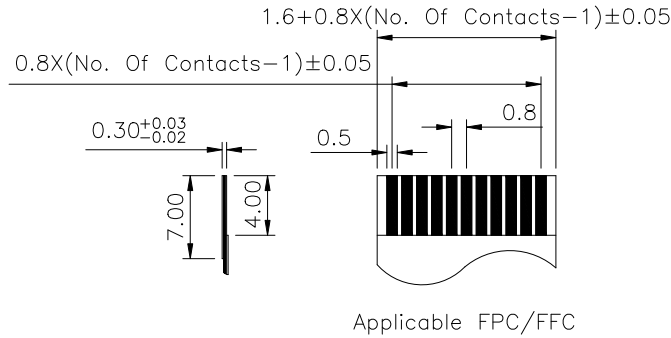


SPECIFICATION

- Material&Finish**
Housing:LCP(UL94V-0)
Slider:LCP(UL94V-0)
Terminal:Phosphor Bronze,Tin Plated Over Nickel
ME:Phosphor Bronze,Tin Plated Over Nickel
- Electrical Characteristics**
Voltage:50V AC(RMS)/DC
Current Rating:1.0A AC(RMS)/DC
Contact Resistance:40 Milliohms Max.(Initial)
Insulation Resistance:800 Megaohms Min.
Withstand Voltage:200V AC/RMS
- Environmental Characteristics**
Operation Temperature:-40°C~+85°C
- RoHS Compliant**

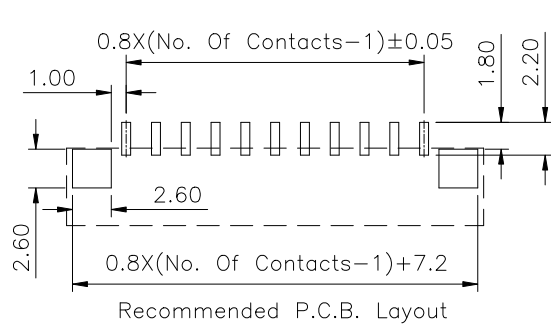

- FPE XX W Z B - R2K - H
(1) (2) (3) (4) (5) (6) (7)
- FPE:0.8mm FPC/FFC
 - XX:No. Of Position/Per Row
 - W:SMT Right Angle
 - Z:ZIF Type
 - B:Bottom Contact
 - R2K:Tape & Reel 2000Pcs/Reel
 - H:RoHS Compliant

Pin	A	B	C	Pin	A	B	C
4	4.1	2.4	9.95	22	18.5	16.8	24.35
5	4.9	3.2	10.75	23	19.3	17.6	25.15
6	5.7	4.0	11.55	24	20.1	18.4	25.95
7	6.5	4.8	12.35	25	20.9	19.2	26.75
8	7.3	5.6	13.15	26	21.7	20.0	27.55
9	8.1	6.4	13.95	27	22.5	20.8	28.35
10	8.9	7.2	14.75	28	23.3	21.6	29.15
11	9.7	8.0	15.55	29	24.1	22.4	29.95
12	10.5	8.8	16.35	30	24.9	23.2	30.75
13	11.3	9.6	17.15	31	25.7	24.0	31.55
14	12.1	10.4	17.95	32	26.5	24.8	32.35
15	12.9	11.2	18.75	33	27.3	25.6	33.15
16	13.7	12.0	19.55	34	28.1	26.4	33.95
17	14.5	12.8	20.35	35	28.9	27.2	34.75
18	15.3	13.6	21.15	36	29.7	28.0	35.55
19	16.1	14.4	21.95	37	30.5	28.8	36.35
20	16.9	15.2	22.75	38	31.3	29.6	37.15
21	17.7	16.0	23.55				

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AUK AND SHALL NOT BE DISTRIBUTED, REPRODUCED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION OF AUK.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±5.0° .X ±0.25 .X.* ±3.0° .XX ±0.15 .XX.* ±2.0° .XXX ±0.10					
PART No. FPEXXWZB-R2K-H		MEI						
DRAWING No. FPEXXWZB-R2K-H		CHECKED BY HZF						
SCALE		DRAWING BY LZX						
NONE	REV.	A0	UNIT mm	NO.REV.	A0	NEW RELEASE	HZF 06/13/2023	
						REVISIONS	CHK DATE	